
IceniCAM Information Service



www.icenicam.org.uk

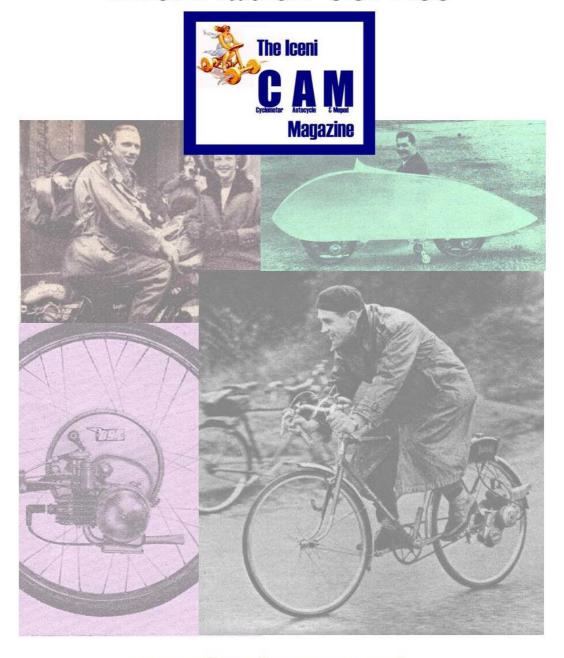

SPECIFICATION:— Motor—Single cylinder, two-stroke. Piston displacement—31 c.c. Compression ratio—1:5.6. Cylinder—Aluminium with special cast iron liner. Cylinder head—Aluminium detachable. Ignition—Wipac Series 90 Magnetorwith lighting coil. Carburettor—Amal. Total reduction ratio—1:18.5. Power transmission—Belt drive by endless rubber reinforced V belt. Fuel tank—capacity about 3 pints. Fuel—1 part oil to 25 parts petrol. Continuous output—0.7 h.p. at 3,500 r.p.m. Maximum speed—18-20 m.p.h. Fuel consumption—250 m.p.g. (approx.). Weight of the total installation—18-20 lbs. approx. Complete with tank and all accessories.

Retail Price £24 No Purchase Tax

BRITISH SALMSON CYCLAID LIMITED

SALES: 76 VICTORIA STREET, S.W.I. TATE Gallery 9138/9

WORKS: Larkhall, Lanarkshire