

THE KING OF CLIP-ONS

THE WORLD'S BEST CYCLE ENGINE

THE FACTS

FITTING

The MOSQUITO can easily be attached to the stiffest part of the frame of any make or type of cycle without alteration to existing fittings.

POSITION

The MOSQUITO is fitted in the only SENSIBLE position where it actually stabilizes the cycle AND IS NOT EASILY DAMAGED BY A FALL.

SUSPENSION

The MOSQUITO has a patent elastic swinging suspension which neutralizes all vibration and causes no more tyre wear than a chain or gear driven model.

GEAR REDUCTION

The MOSQUITO has a 2 to 1 Gear Reduction which permits speeds between walking pace and 20 m.p.h. and gives an outstanding performance on hills.

CONTROL


The MOSQUITO has a simple two lever control suitable for anyone and it may be completely disengaged in a second to permit normal pedalling.

OVER 175,000 ALREADY IN DAILY USE.

NO PURCHASE TAX

COMPLETE

THE CURE FOR ALL HILLS.



ENGINE CHARACTERISTICS

Bore 35 m.m. Stroke	40	m.m.	equals			38.5 с с.
R. P. M		8.640	***			4,200
Corresponding Speed		449	+++		***	20 m p.h.
Minimum Speed		***	***	+**		4 m.p.h.
Gradient climbed with	out	pedal a	ssistance			1 in 10
Fuel Consumption approximately					1000	250 m.p.g.
Tank Capacity	33		***			125 m.p.g.
Net weight of Engine	22		***	44.		15 pounds

The MOSQUITO is a two stroke engine with a longer wearing three ring cast iron piston with a flat head.

Mixture lubrication of about a quarter of a pint of oil to half a gallon of petrol.

Drive is by a large diameter ribbed roller driven through reduction gears. The drive pressure is automatically ensured by two springs so that the engine follows the tyre contour exactly.

Ignition by a trouble free Magneto of unique patented Mosquito Design.

Sole Manufacturer and Distributor for the U.K. and British Commonwealth

MOSQUITO MOTORS LTD.


(Bob Sergent of Liverpool)

MOORFIELDS LIVERPOOL, 2

CENtral 2829

Telegrams MOSQUITO, LIVERPOOL

IceniCAM Information Service

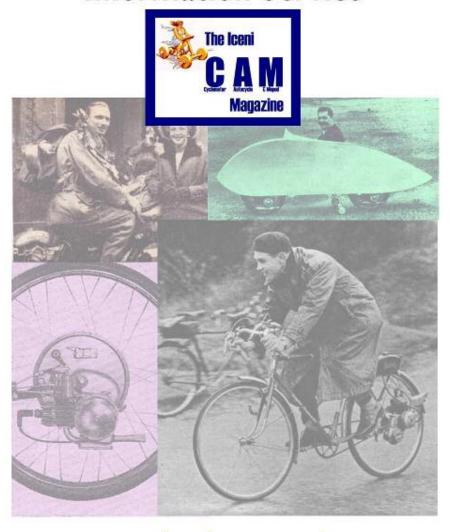

www.icenicam.org.uk