
# IceniCAM Information Service



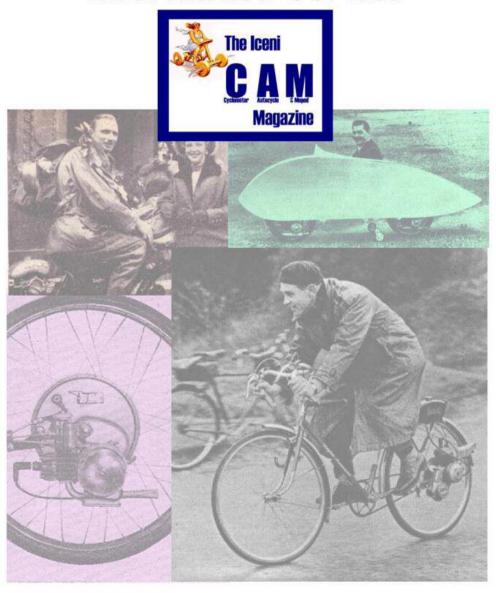

### HOTOMISE CENTRAL PORTOR

#### BICYCLE SPECIFICATION.

FRAME. 22" with curved top tube dropping to 20". Built from heavy gauge tubing. Front fork heavy duty pattern with malleable

crown and 16 gauge fork blades fitted with liners and girder

fork attachment for maximum support.

Front-26" × 13" with Phillips' Hub Brake, cable control, and WHEELS.

13 gauge spokes.

Rear-26" × 13" with Coaster Hub Brake and 13 gauge spokes. Front and Rear Wheels are fitted with 26" × 13" Dunlop Carrier

tyres with Schrader valves.

HANDLEBAR. Allrounder 23" wide.

Phillips' moulded rubber 4" with extended end plates. PEDALS.

Large spring seat with C.P. springs. SADDLE.

MUDGUARDS. Heavy gauge extra wide with double stays.

Robust half section. CHAINGUARD.

FINISH. Frame Silver Grey enamelled, lined single red on "Bonderized"

rust proof surface. All bright parts chromium plated.

Number Plates, Licence Holder, Front and Rear Lamps, Kick-EQUIPMENT. stand, Metal Pump, Toolbag and Tools.

Supplied to order only. Electric Horn, Speedometer. EXTRAS.

#### CYCLE-MOTOR SPECIFICATION.

ENGINE. 49 c.c. two stroke with a stroke and bore of 38.25 × 40.5 m.m.;

incorporates an aluminium alloy cylinder barrel with cast liner and a detachable aluminium alloy cylinder head to facilitate

easy decarbonisation.

IGNITION AND LIGHTING.

CLUTCH.

By Bosch Rotary Magneto, incorporating a 6 volt/6 watt lighting circuit, complete with front and rear lamps.

TRANSMISSION.

By  $\frac{1}{2}'' \times \frac{3}{16}''$  Carrier chain to independent sprocket on rear wheel and incorporating special chain tensioning device.

Advanced design dry multi-plate type, which ensures easy and delicate take-up with positive drive. Two stage trigger stops on

lever to ensure freedom from drag when engine is disengaged. Gives fuel consumption of approxi-

CARBURETTOR.

mately 180-200 m.p.g. and has special "rich mixture" device for easy starting. An important feature of this device is that it is self-cancelling from the throttle twist grip without dismounting or removing either hand

from the bar.

**FUEL AND** LUBRICATION.

It is important to observe the correct mixture of 25 parts petrol to I part of

PETROL TANK. Capacity approximately & gallon. Has the unusual advantage of being fitted

with two-way tap for switching on to a reserve supply in case of emergency.

PHILLIPS CYCLES LIMITED . SMETHWICK . BIRMINGHAM







**Motorised Bicycle** 



the 'complete' answer to motorised cycling



## MOTORISED BICYCLE for

maximum pleasure at minimum cost



The Phillips Motorised Bicycle is designed to transport you comfortably and smoothly, mile after mile, and the specially developed engine is powered to ensure that all but the most severe main road hills can be negotiated without manual assistance.

Produced after long experience and research and tested under the most arduous conditions this machine is built throughout from the finest materials and backed by over sixty years' specialised manufacturing experience.

The power unit is positioned to ensure perfect balance and safe riding and all moving parts are protected to avoid contact with the rider's clothes.

Easy to start, simple to ride and control, and amazingly economical to run, the Phillips Motorised Bicycle requires only the minimum of maintenance and will give you years of trouble-free and pleasurable service.

ATTRACTIVE EASY
PAYMENT TERMS
AVAILABLE THROUGH
YOUR DEALER

... balanced perfection of Motorised Cycling