a Service Bulletin

MOTOR CYCLES LIMITED GREET, :: BIRMINGHAM, 11, :: ENGLAND.

TELEPHONE: VICTORIA 2211 (2 lines)

TELEGRAMS:
JAMES GREET BIRMINGHAM
TELEX

YOUR REF.

NUMBER

OUR REF

JMO'H/JNM/H.

3/59.

LUBRICATION

- After a series of exhaustive tests, we are now able to 1. recommend that Castrol Two Stroke Oil, at a ratio of 16:1, be added to the list of approved engine lubricants for use in the Cavalier 175 and Commodore 250 models.
- 2. It is well known that all two-stroke engines tend to suffer from corrosion of the main bearings if they are used only for short journey work, when the power unit does not become hot enough to vaporise the corrosive products of combustion. Therefore, it is strongly recommended that James owners be advised to use only oils containing a corrosion inhibitor. which will prevent this trouble, and we give below particulars of such oils which we have tested and approved.

These oils are, of course, equally suitable for long distance or high-speed work.

SHELL

2T Two Stroke Petroiler Mix, or 2T Two Stroke Oil 20:1.


B.P.

Zoom or Energol Two Stroke Oil 20 : 1.

CASTROL

Two Stroke Oil 16:1.

IceniCAM Information Service

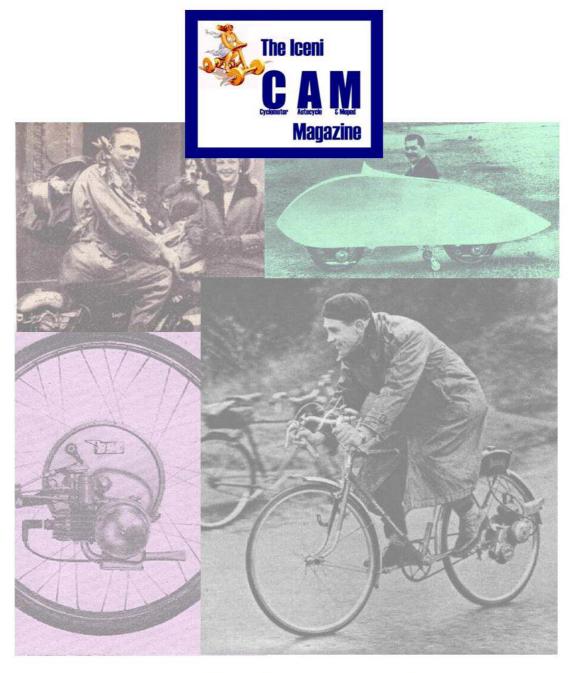

www.icenicam.org.uk